



ANLY TIMER

ET2-41 TWIN TIMER



CHARACTERISTIC :

- Wide operating voltage range, AC/DC 24V~240V
- 10 time range, from 1 second to 300 hour
- X1, Y1, Y2 contact for mode control
- 22.5 mm thin body design


SPECIFICATION :

Operating voltage	AC/DC(V): 24~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 3VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 93g

TYPE SELECTION :

Type	ET2-41
Operation mode	B6
Output contact	2C / 1A1C
Time range	10 Ranges: 1s / 3s / 10s / 30s / 100s / 300s / 30m / 300m / 30h / 300h


CONNECTION :

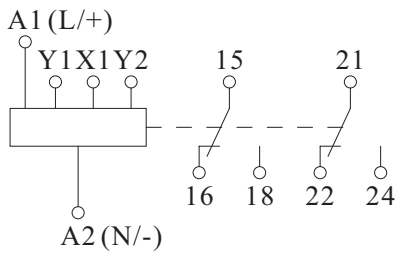

Contact	Short	Open
Y1-A1	Repeat cycle (OFF start)	Repeat cycle (ON start)
Y2-A1	2C (15-16/18 & 21-22/24 are time delay contact)	1A1C (15-16/18 is time delay contact, 21-22/24 is instantaneous contact)
X1-A1	Gate	---


TIMING CHART :

Mode B6 : Circulation

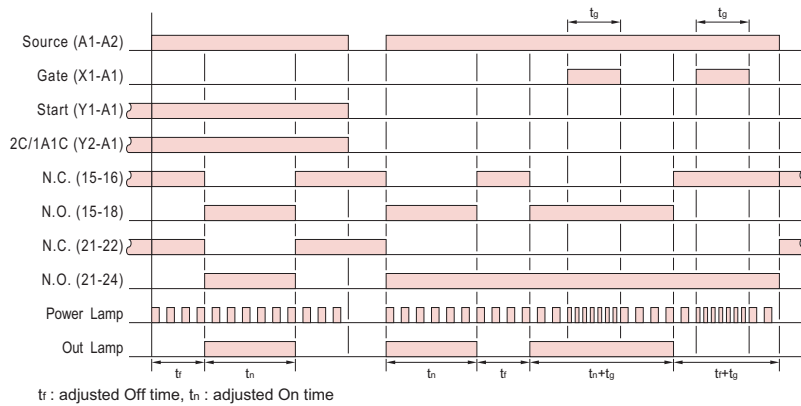

DIMENSIONS : (mm)

N type(Surface Mounting):

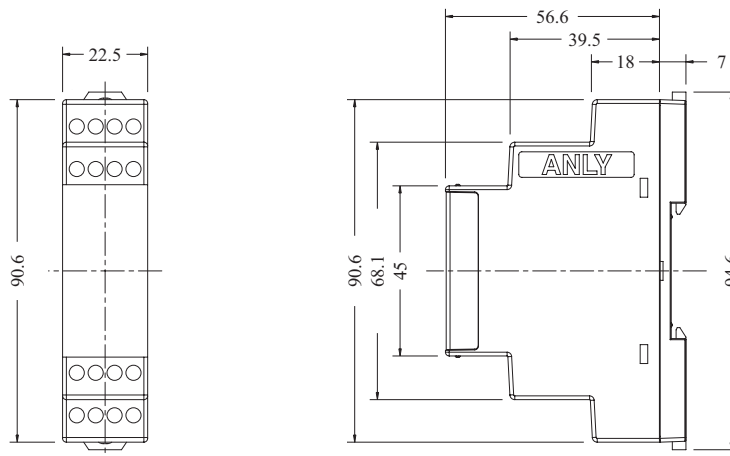

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041
TEL: +86-21-6218-3300 FAX: +86-21-6217-5911