



ANLY TIMER

H3D-S ANALOGUE TIMER



CHARACTERISTICS :

- Customized CMOS IC for low power consumption, high operation stability and extreme timing accuracy
- 15 time ranges, from 1 second to 24 hour
- 17.5 mm thin body design
- CE certified


SPECIFICATION :

Operating voltage	DC(V): 12, 24, 48 AC(V): 12, 24, 48, 100~120, 200~240
Allowable operating voltage range	90~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1s
Power consumption	Approx. 7VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approximatly 54g


TYPE SELECTION :

Type	H3D-S
Time range	1, 3, 6, 10, 30, 60 sec, 3, 6, 10, 30, 60 min, 3, 6, 10, 24 hr
Output contact	1C
Output mode	On Delay


CONNECTION :



TIMING CHART :

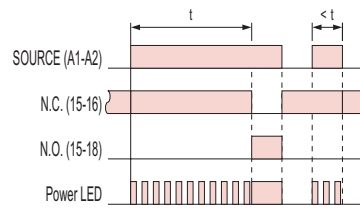

DIMENSIONS : (mm)

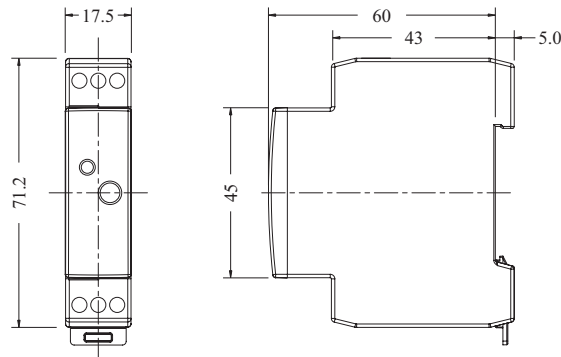

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Shinjuang City, Taipei, Taiwan 242
 TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
 TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
 TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingnan District, Shanghai, China 200041
 TEL: +86-21-6218-3300 FAX: +86-21-6217-5911