



# ANLY TIMER

ANLY

## AH4D DIGITAL TIMER



### CHARACTERISTIC :

- 7-segment-display for clear display and effective monitoring
- All parameters set by scrollthrough menus accessed from the front panel
- Time ranges selectable from 0.1S to 9999H
- Precision and accuracy up to 0.1S
- Count Up or Count Down mode selectable
- Delayed outputs or Instantaneous + Delayed outputs selectable


### SPECIFICATION :

Operating voltage	AC/DC(V): 24-240V
Allowable operating voltage range	90~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 5VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C (without condensation & freezing)
Ambient humidity	MAX 85% RH (without condensation)
Altitude	MAX 2000m
Weight	Approx. 88g


### TYPE SELECTION :

Time range	1-1 999.9S, 1-2 9999S, 1-3 999.9M, 1-4 9999M, 1-5 999.9H, 1-6 9999H	
Up / Down	2-1 Count Up	2-2 Count Down
Output contact	3-1 Delayed	3-2 Instantaneous + Delayed

## CONNECTION :

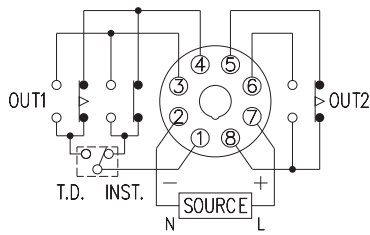


## SETTING :

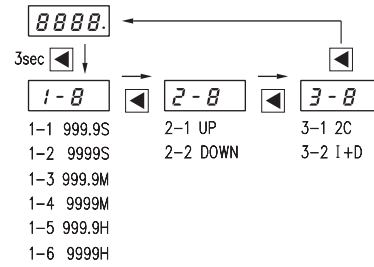


## TIMING CHART :

Mode **A** : Delayed

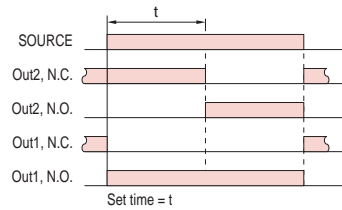


## DIMENSIONS : (mm)

N type(Surface Mounting): Using PF085A Socket & FH-3

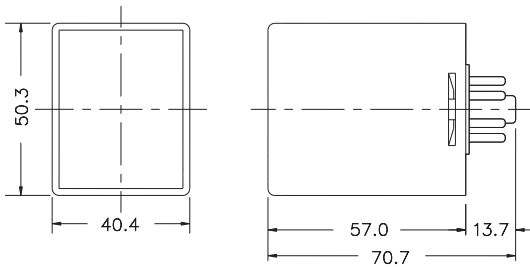

Y type(Flush Mounting): Using Y-40 Frame & US-08 Socket or P3G-08 Socket

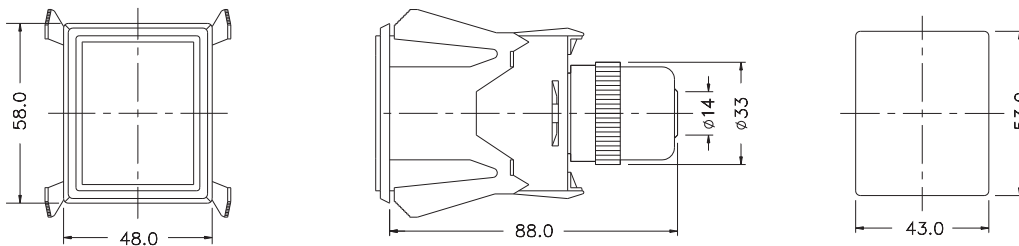

Tolerance:±0.1

## ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

### TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan  
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

### MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia  
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

### HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong  
TEL: +852-2397-2505 FAX: +852-2397-6080

### SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041  
TEL: +86-21-6218-3300 FAX: +86-21-6217-5911

NO. AH4D-R-A