



ANLY CONTROLLER

EP2-1 3-PHASE SEQUENCE PROTECTION RELAY




CHARACTERISTIC :

- Switching Mode Power Supply architecture
- High immunity to inverters' high frequency noise
- Can detect power source phase reversal before motor start, also can detect Phase-loss and unbalance while motor operating or before motor start
- Suitable for main power source and motor starter circuit to prevent damage from insufficient phase or phase reversal
- Phase sequence detection - Output contact Release while phase reversal
- Phase-loss detection - 3sec fixed tripping delay
- 3-phase voltage balance detection - 3sec fixed tripping delay
- 1sec fixed reset delay
- Install on DIN rail and no socket require


SPECIFICATION :

Operating voltage	AC(V) : 220~440
Allowable operating voltage range	80~120% of rated operating voltage
Rated frequency	50 / 60 Hz
Detecting method	Detect voltage
Contact rating	250VAC 5A resistive load
Power consumption	Approx. 3VA(220VAC)
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85% RH
Weight	Approx. 75g


TYPE SELECTION :

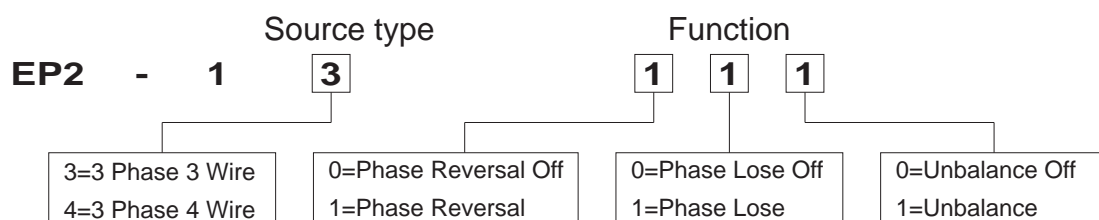

CONNECTION :

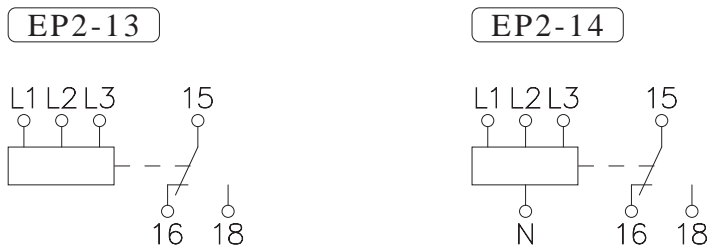


TIMING CHART :

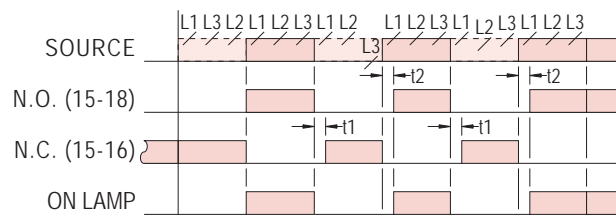

t1 : Tripping delay time
t2 : Reset delay time

DIMENSIONS : (mm)

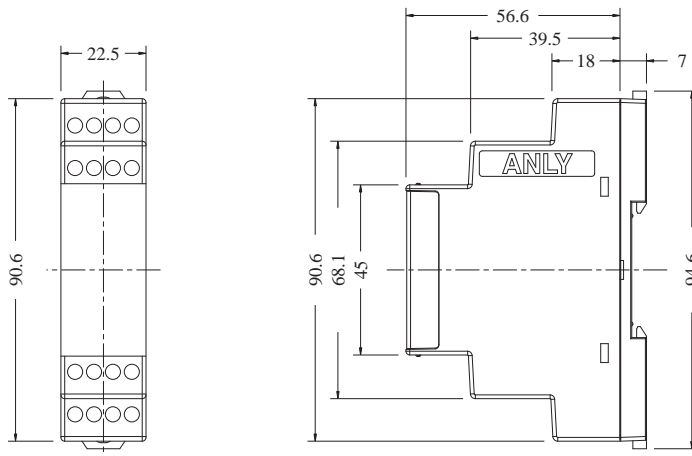

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Triseqi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041
TEL: +86-21-6218-3300 FAX: +86-21-6217-5911